

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number  
**WO 03/055653 A1**(51) International Patent Classification<sup>7</sup>: **B25J 9/10**(21) International Application Number: **PCT/GB02/05943**(22) International Filing Date:  
30 December 2002 (30.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
20010145160 31 December 2001 (31.12.2001) CN(71) Applicants (for all designated States except US): **TIANJIN UNIVERSITY** [CN/CN]; No. 9 Building Tianjin University, Tianjin 300072 (CN). **UNIVERSITY OF WARWICK** [GB/GB]; Gibbet Hill Road, Coventry CV4 7AL (GB).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **HUANG, Tian** [CN/CN]; Tianjin University, No. 9 Building TianjinUniversity, Tianjin 300072 (CN). **LI, Meng** [CN/CN]; Tianjin University, No. 9 Building Tianjin University, Tianjin 300072 (CN). **LI, Zhanxian** [CN/CN]; Tianjin University, No. 9 Building Tianjin University, Tianjin 300072 (CN). **CHETWYND, Derek G.** [GB/GB]; University of Warwick, Gibbet Hill Road, Coventry CV4 7AL (GB). **WHITEHOUSE, David J.** [GB/GB]; University of Warwick, Gibbet Hill Road, Coventry CV4 7AL (GB).(74) Agents: **GRAY, James** et al.; Withers & Rogers, Goldings House, 2 Hays Lane, London SE1 2HW (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

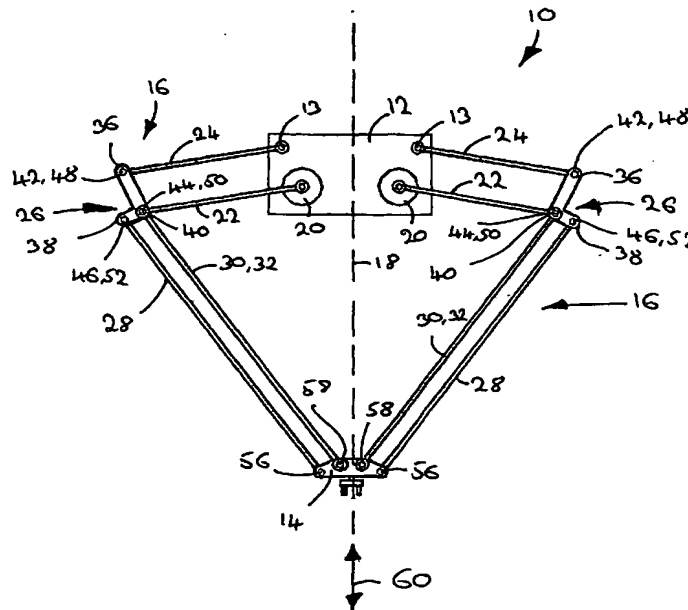(54) Title: **PLANAR PARALLEL ROBOT MECHANISM WITH TWO TRANSLATIONAL DEGREES OF FREEDOM**

(57) Abstract: A linkage mechanism for a pick and place robot comprises two rotatable drive members (20) mounted on a base (12) and connected to a platform (14) by a respective two element linkage (22, 30). The mid point of the two element linkage has a bell crank (26), the arms of which are connected to first and second location links (24, 28) anchored respectively at the base and platform. The platform may be configured to carry various implements, and the mechanism permits movement thereof in two dimensions by selective rotation of the drive members (20).



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## PLANAR PARALLEL ROBOT MECHANISM WITH TWO TRANSLATIONAL DEGREES OF FREEDOM

The present invention relates to a translational parallel robot mechanism of the type typically referred to as a pick and place robot.

5

Pick and place robot mechanisms are typically utilised in light industries such as the electronics industry and packaging industries where they are required to accurately repeat a simple operation many times over. Such an operation may, for example, involve the repeated picking up of items at a first location with a gripping mechanism, moving a gripped item to a second location, and releasing said item at said second location. The gripping mechanism is typically mounted to a movable platform.

10

In order to meet the performance criteria typically required of a robot mechanism of this type, the platform is typically required to be moved at a relatively high speed with two degrees of freedom in a movement plane without altering the posture of platform. Optionally the mechanism as a whole may also be required to move in a relatively slow or stepwise manner in a direction normal to the movement plane of the platform

15

According to the present invention there is provided a mechanism comprising a base and a platform movable relative to the base in a plane extending through the base and platform, the base being provided with two rotatable drive members connected to the platform via respective linkages, each linkage comprising a drive link having a first end fixed for rotation with a respective drive member and a driven link having a first end pivotally connected to the platform, the respective second ends of the drive and driven links being pivotally connected together, wherein one of said linkages further includes location means operable to maintain the platform in a predetermined orientation with respect to the base during movement thereof, the location means comprising a bell crank provided at the pivotal connection between the drive and driven links, a first location link pivotally connected between one arm of the bell crank and the base, and a second location link pivotally connected between the other arm of the bell crank and the platform.

20

25

30

Such an arrangement permits the platform to be moved in two dimensions by selective rotation of the drive members, either in the same direction or in opposite directions, and to different extents, whilst maintaining the platform in a predetermined orientation.

5

The linkage having the location means may advantageously be provided with two spaced driven links mounted on common pivotal connections to the bell crank and platform respectively. It will be appreciated that the provision of twin driven links enhances the rigidity of the mechanism as a whole. Bracing means may be provided  
10 between the driven links. Such bracing means may comprise one or members extending between the driven links. Said members may extend substantial normal to the longitudinal direction of the links. Alternatively said members may extend diagonally between the links. The bracing means may preferably comprise a combination of both types of members.

15

In a preferred embodiment both linkages are provided with a location means having the configuration hereinbefore described.

20

The base may be arranged so as to be movable in a direction substantially normal to the movement plane of the platform. Such movement may be effected by the mounting of the base on an appropriate single degree of freedom movement means. Such a movement means may comprise a linear drive mechanism.

25

The first location link extending between the bell crank and the base may be provided with spherical connection means, such as ball joints or rose joints, at each end thereof. Spherical connection means may further be provided between the each end of the second location link and the bell crank and platform respectively. The connection between the or each driven link and the platform may also be effected by a spherical joint.

30

In the preferred embodiment the drive and driven links are inboard of the location means. The drive links and the first location link(s) are preferably of equal length. The

driven link(s) and second location link(s) are preferably of equal length. In the preferred embodiment one arm of each bell crank is longer than the other arm, and preferably the longer arm is connected to a respective driven link.

- 5 In the preferred embodiment the axes of the drive members are parallel and perpendicular to said plane. In the preferred embodiment the drive members are driven by respective motors located on the same side of said linkage. A line passing through the axes of the drive members is preferably parallel to a line passing through said second ends, and preferably also to a line passing through said first ends of the driven  
10 links.

The axes of the drive members are preferably spaced apart by less than the length of a drive link.

- 15 In the preferred embodiment the driven links are longer than the drive links.

Embodiments of the present invention will now be described with reference to the accompanying drawings in which:

- 20 Figure 1 shows an end view of a mechanism according to a first embodiment of the present invention, the mechanism being shown in a centralised position;

Figure 2 shows a side view of the mechanism of figure 1;

Figure 3 shows a perspective view of the mechanism of figure 1;

Figures 4a and 4b show an end view of the mechanism of figure 1, the mechanism being shown in opposite laterally displaced positions;

- 25 Figure 5 shows a perspective view of the mechanism of figure 1 mounted on a traversing assembly;

Figure 6 shows an end view of a mechanism according to a second embodiment of the present invention;

- 30 Figure 7 shows a perspective view of a mechanism according to a third embodiment of the present invention; and

Figure 8 shows a plan view of a linkage of the mechanism of figure 7.

Referring firstly to figures 1 to 5 there is shown a mechanism generally designated 10. The mechanism comprises a base 12, a movable platform 14 and two kinematic chains or linkage arrangements 16 extending between the base 12 and the platform 14. It will be noted that the mechanism 10 of figures 1 to 5 is symmetrical about a plane indicated by broken line 18 passing through both the base 12 and working element in figure 1. The base 12 is provided two rotatable drive shafts 20 which are operable to move the platform 14 relative to the base 12 via the linkage arrangements. The drive shafts 20 extend from an appropriate drive source, for example servo motors mounted on the base 12. The platform 14 may be configured so as to accommodate a range of attachments including, for example, a gripping means, a sensor or a tool.

The linkage arrangements 16 each comprise a pair of upper links 22, 24 of equal length, a bell crank assembly 26 and three lower links 28, 30, 32 of equal length. It will be recognised by those skilled in the art that the links 22,24,28,30,32 and bell crank assembly 26 of each linkage arrangement 16 are arranged so as to provide upper and lower parallelogram linkages between the base 12 and the platform. The links comprise elongate members having eyes at each end. The upper links 22, 24 comprise a drive link 22 which is fixed for rotation with a drive shaft 20, and an upper location link 24 which is pivotally fixed to the base 12 via a pin 13. Each bell crank assembly 26 comprises a spaced pair of substantially "L" shaped bell crank members 34 each having a pair of legs 36,38 extending from a common root 40. Through holes 42,44,46 are provided at the root 40 and at the end of each leg 36, 38 respectively. The through holes 42,44,46 accommodate pins 48,50,52 extending between the spaced bell crank members 34. The pins 48,50,52 enable ends of the links 22,24,28,30,32 to be pivotally connected to the bell crank assembly 26. As will be readily observed from the embodiment of figure 1 the upper links 22,24 are connected to the bell crank assembly 26 between the bell crank members 34, with the drive link 22 being connected at the root 40 of the bell crank members 34 and the location link 24 connected to the end of one of the leg pairs 36.

The lower links 28,30,32 of each linkage arrangement 16 comprise a lower location link 28 and two driven links 30,32. The location link 28 is pivotally connected between the

other of the leg pairs 38 of the ball crank assembly 26 and a fork 54 of the platform 14. The location link 28 is pivotally connected to the fork 54 by a pin 56. The driven links 30,32 extend from the root 40 of the bell crank 26 assembly to the platform 14. It will be noted that the driven links 30,32 are provided outboard of the bell crank assembly 26 and hence can be mounted on a common pin 50 to the drive link 22. The inner links 30, 32 are further mounted on a common pin 58 to the platform 14.

Movement of the platform 14 relative to the base 12 is achieved by rotation of the drive shafts 20 and drive links 22. Rotation of the drive shafts 20 in opposite directions causes the platform 14 to be moved either towards or away from the base 12 as indicated by arrow 60 on figure 1. Rotation of the drive shafts 20 in the same direction causes the platform 14 to be moved laterally with respect to the base as shown in figures 4a and 4b. It will thus be appreciated that the platform 14 has 2 degrees of freedom within a notional plane passing through the base 12 and platform 14. This motion is achieved with two drive shafts 20 having only a single degree of freedom, i.e. rotation. The linkage arrangements 16 imbue the mechanism 10 with both static and dynamic stiffness, especially in the direction normal to the aforementioned plane of motion.

In the above described embodiment of the mechanism 10, the various pivotal connections are achieved by pins and eyes of the links. It has been found however that certain of these pivotal connections may be replaced by spherical joints without affecting the operation of the device. In particular the respective connections of the upper location link 24 to the base 12 and bell crank assembly 26, the lower location link 28 to the bell crank assembly 26 and the platform 14, and the connection of driven links 30,32 to the platform 14 may comprise spherical joints. The use of such spherical joints enables the elimination of reaction forces due to misalignment, for example due to wear or manufacturing tolerances, without adversely affecting the stiffness and mobility of the mechanism as a whole.

The mechanism 10 may further be arranged so as to be movable in a direction normal to that of the plane of motion of the platform 14. This may be effected by the mounting

of the base 12 to a movement device such as a single degree of freedom linear drive 62. The linear drive 62 comprises a motor 64, guide members 66, end plates 68 and a lead screw 70. The guide members 66 extend between the end plates 68 and through apertures of the base 12. The lead screw 70 is rotatable by the motor and passes  
5 through a captive nut provided in the base 12. It will be understood that rotation of the screw 70 causes the base 12, and hence the mechanism 10 as a whole, to move along the guide members as indicated by arrow 72. It will be appreciated that other movement devices known in the art may be utilised to move the mechanism 10. The mechanism may, for example, be fitted to a traveller which is movable by interaction with a driven  
10 endless belt.

Referring now to figures 7 and 8 there is shown a second embodiment of a mechanism according to the present invention and generally designated 74. The mechanism 74 is for the most part similar to that described with reference to figures 1 to 5 and hence  
15 common features are identified with like reference numerals. The mechanism 74 of figures 7 and 8 differs from that of figures 1 to 5 in that bracing means 76 are provided between the driven links 30,32. The bracing means 76 comprise transverse brace members 78 and diagonal brace members 80. In the embodiment shown there are provided three transverse members 78 positioned respectively at each end and midway  
20 between the driven links 30,32, and four diagonal members 80 provided in two pairs. It will be understood that other arrangements of the bracing members 78,80 are possible. The inclusion of the bracing members 78,80 has been found to increase the static and dynamic stiffness of the mechanism normal to the motion plane of the platform 14 with little overall increase in the weight of the mechanism 74

25

In the aforementioned embodiments the mechanisms 10,74 have each been provided with pairs of inner lower links 30,32. It will be appreciated that a mechanism in accordance with the present invention may be provided with a single inner lower link on each side and still function effectively. The use of two inner lower links is preferred  
30 however for the structural rigidity it imparts to the mechanism as a whole.



Referring finally to figure 6 there is shown a third embodiment of a mechanism according to the present invention generally designated 82. As before, features common to the previously described embodiments are identified with like reference numerals. The mechanism 82 differs from those previously described in that it is provided on one side with a linkage arrangement 16 of the previously described type and on the other side with a simplified linkage arrangement 84. The simplified arrangement 84 comprises a drive link 86 fixed for rotation with a drive shaft 20 and a driven link 88 pivotally connected to the platform 14. The drive and driven links 86,88 are joined by a common pinned link or hinge 90. It will be readily understood that the more complicated linkage arrangement 16 maintains the required orientation of the platform 12 relative to the base 12, while the simplified linkage arrangement 84 enables motive forces from the drive shaft 20 with which it is associated to be applied to the platform 14.

**Claims**

1. A mechanism comprising a base (12) and a platform (14) movable relative to the base (12) in a plane extending through the base (12) and platform (14), the base  
5 (12) being provided with two rotatable drive members (20) connected to the platform (14) via respective linkages, each linkage comprising a drive link (22) having a first end fixed for rotation with a respective drive member (20) and a driven link (30,32) having a first end pivotally connected to the platform (14), the respective second ends of the drive and driven links being pivotally connected together, wherein one of said  
10 linkages further includes location means (24,26,28) operable to maintain the platform (14) in a predetermined orientation with respect to the base (12) during movement thereof, the location means comprising a bell crank (26) provided at the pivotal connection (50) between the drive and driven links, a first location link (24) pivotally connected between one arm of the bell crank (26) and the base (12), and a second  
15 location link (28) pivotally connected between the other arm of the bell crank and the platform (14).
2. A mechanism according to claim 1 and provided with two spaced driven links (30,32) mounted on common pivotal connections to a bell crank (26) and said platform  
20 (14) respectively, the links being spaced perpendicularly to said plane.
3. A mechanism according to claim 2 wherein bracing means are provided between the driven links (30,32).
- 25 4. A mechanism according to any preceding claim wherein said first location link (24) is provided with spherical connection means at each end thereof.
5. A mechanism according to any preceding claim wherein said second location link (28) has spherical connection means at each end thereof.  
30
6. A mechanism according to any preceding claim wherein said driven links (30,32) have spherical connection means at each end thereof.


7. A mechanism according to any preceding claim wherein the driven links (30,32) are longer than the drive links (22).



5 8. A mechanism according to any preceding claim wherein said location means is outboard of said linkages.



9. A mechanism according to any preceding claim wherein both linkages are provided with said location means (24,26,28).



10

10. A mechanism according to any preceding claim wherein said base (12) is movable in a direction substantially normal to said plane by a linear drive mechanism.

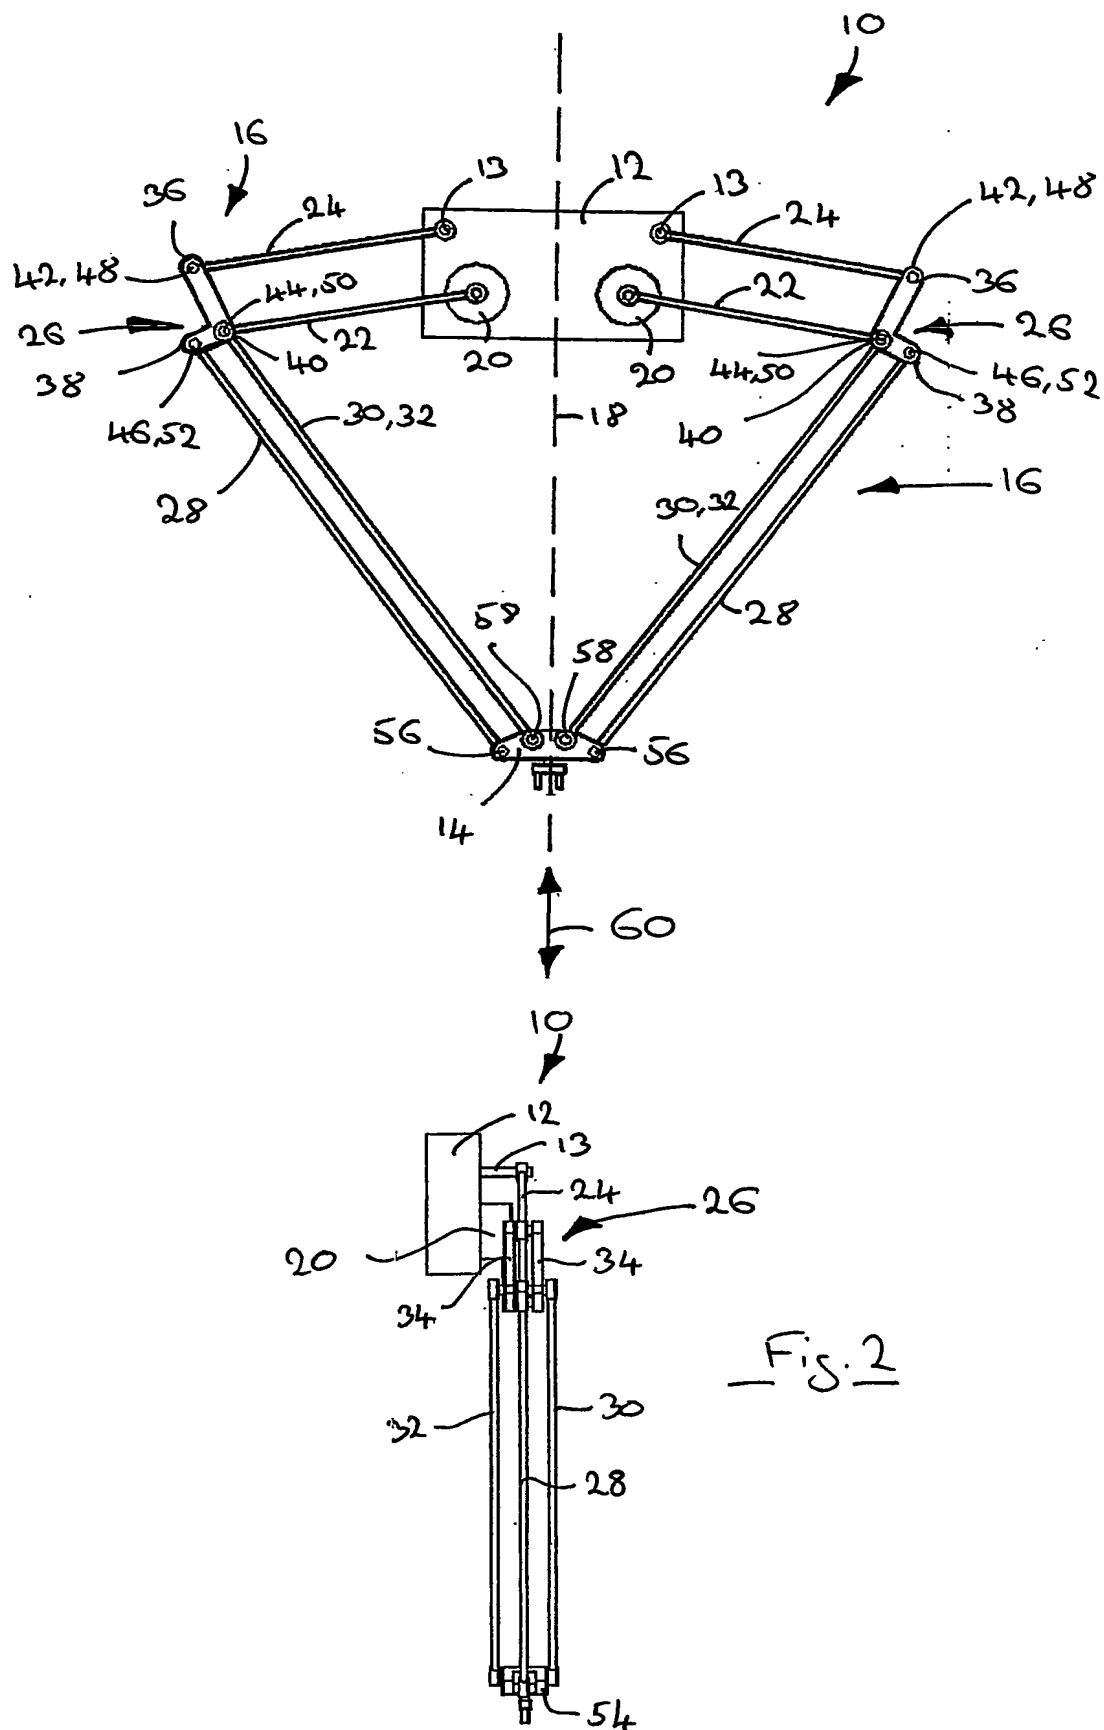

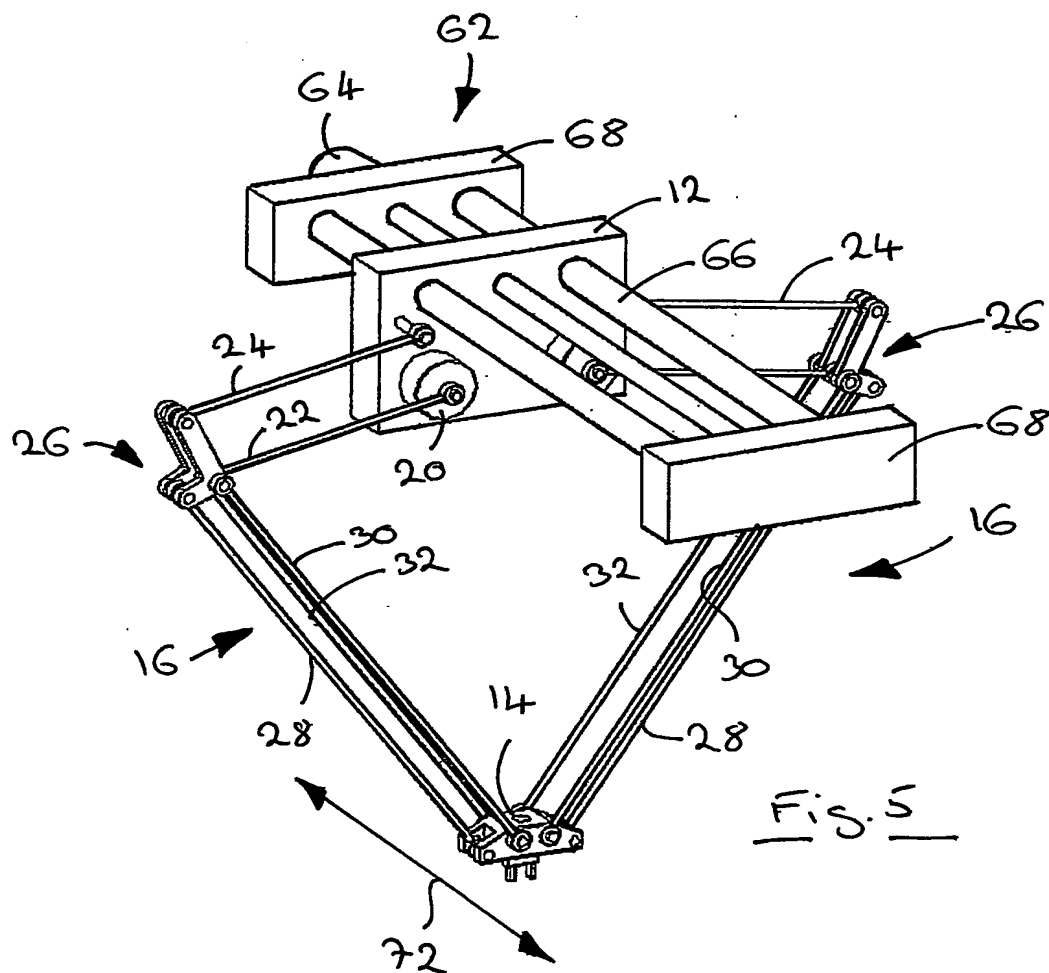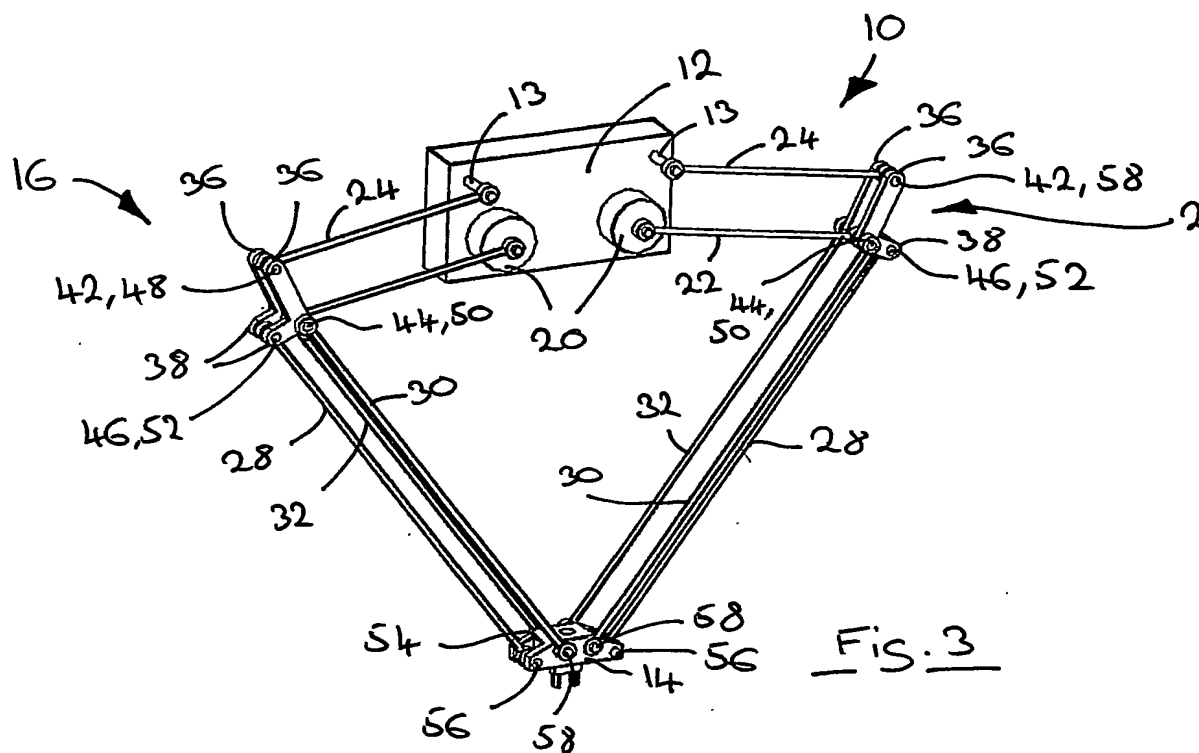

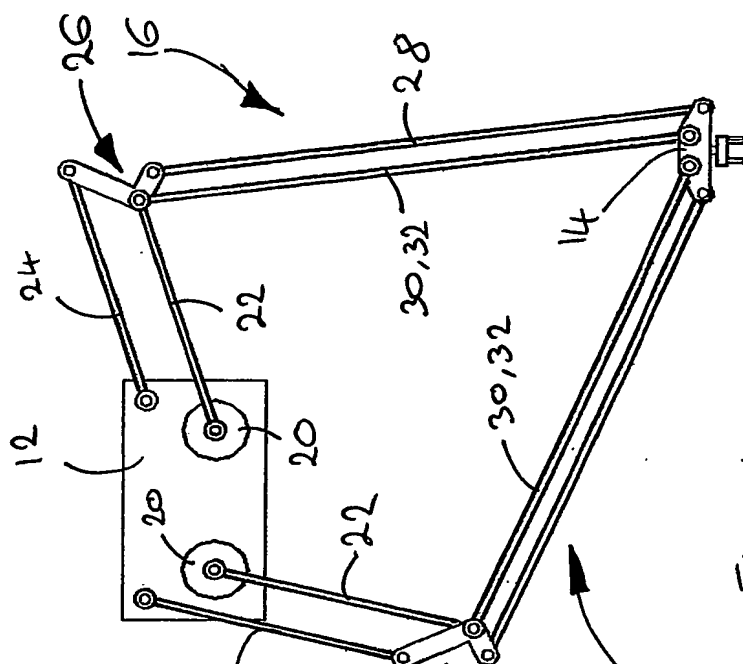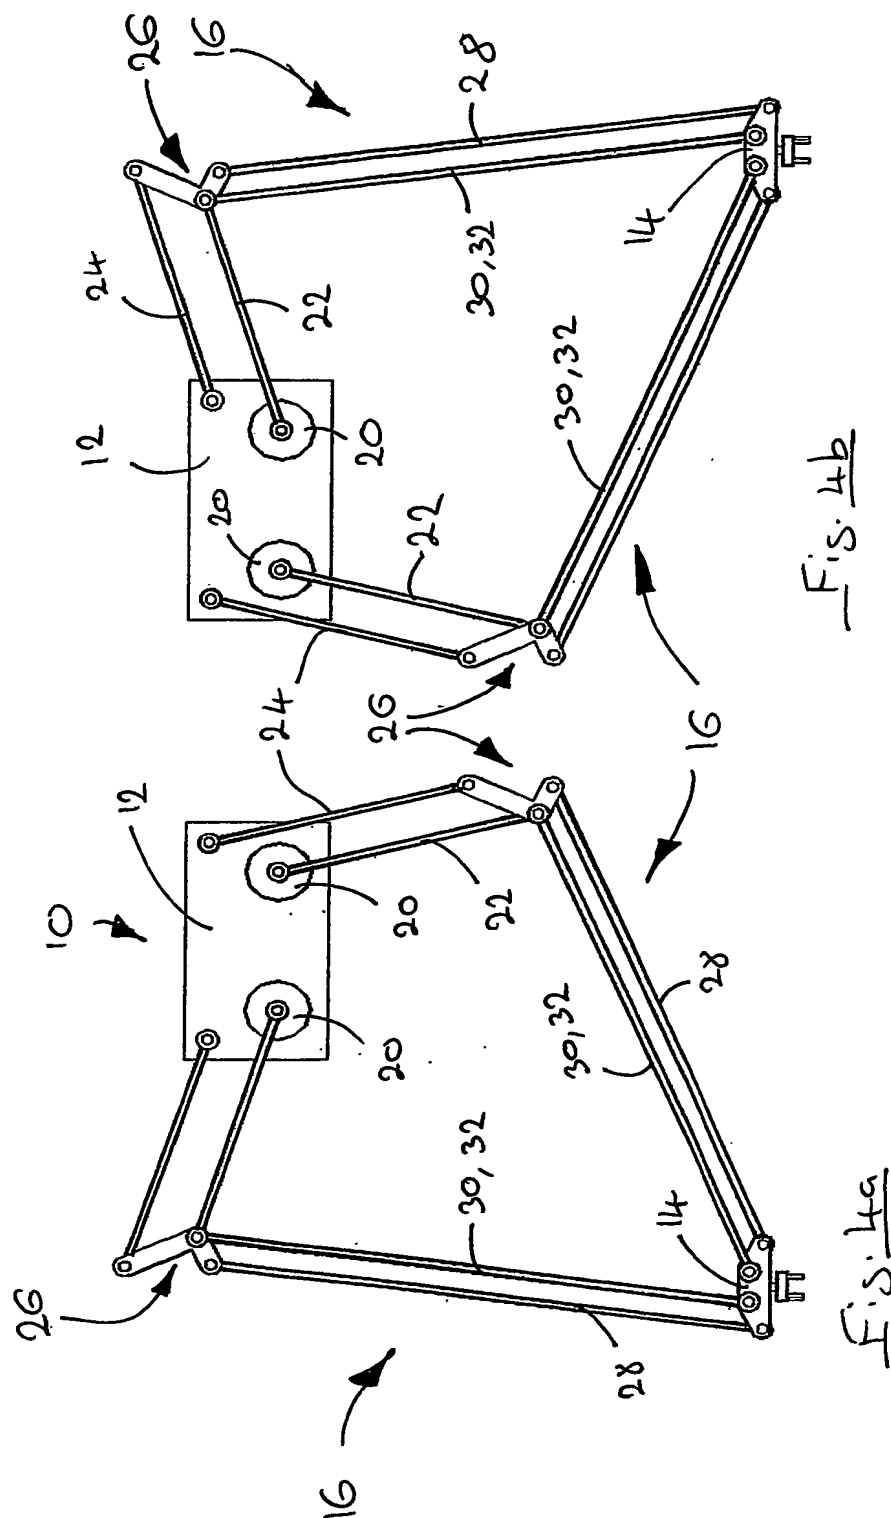

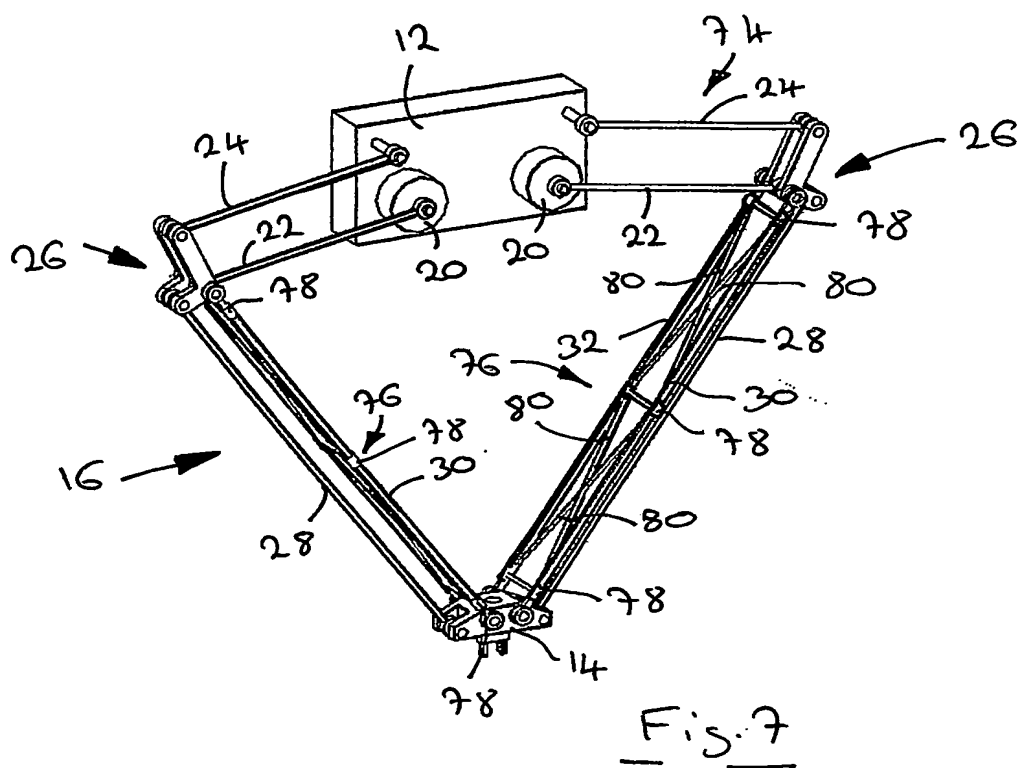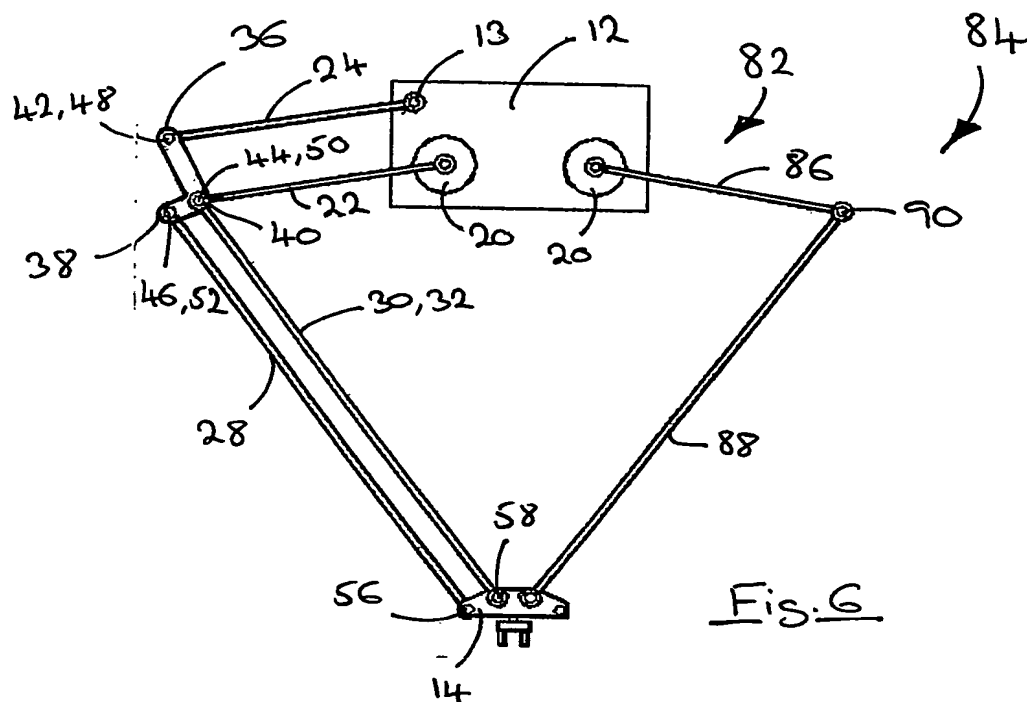

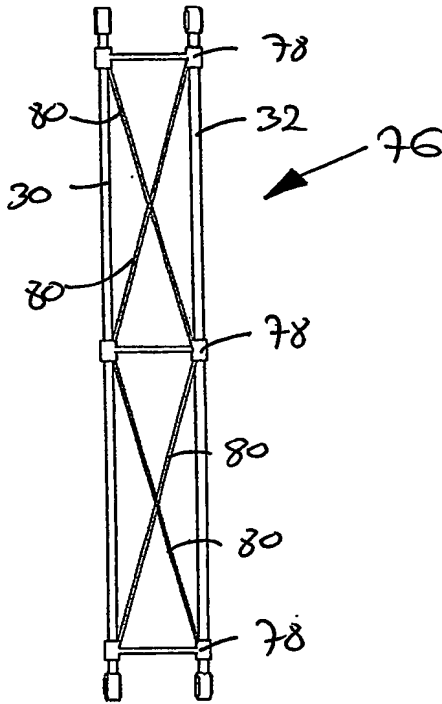


Fig. 8



Internat                      plication No  
PCT/GB 02/05943

According to International Patent Classification (IPC) or to both national classification and IPC

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B25J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 095 011 A (BROGAARDH TORGNY) 1 August 2000 (2000-08-01) column 4, line 63 -column 6, line 22; figures 3,4 column 10, line 58 -column 11, line 25; figure 22 column 13, line 9 - line 18; figures 34,35	1
Y	-----	2,3,7-10
Y	DE 199 30 287 A (CROON NICO; HAUCK TIMO (DE); DAGEFOERDE KLAUS (DE)) 4 January 2001 (2001-01-04) column 3, line 21 - line 35; figure 4	2,8,9
Y	----- US 4 962 676 A (VAINSTOCK MICHAEL) 16 October 1990 (1990-10-16) figure 1 -----	3
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

**\*A** document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

**"O"** document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

**"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone**

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

**"&" document member of the same patent family**

Date of the actual completion of the international search

9 April 2003

Date of mailing of the international search report

24/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lumineau, S

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 02/05943

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 107 719 A (KOTA SRIDHAR) 28 April 1992 (1992-04-28) column 5, line 49 - line 63; figures 2,3 -----	7,10
P,X	EP 1 234 642 A (A & F AUTOMATION & FOERDERTECH) 28 August 2002 (2002-08-28) abstract; figure -----	1-3,7,8
A	US 6 301 988 B1 (BROGAARDH TORGNY) 16 October 2001 (2001-10-16) column 5, line 62 -column 6, line 3 column 7, line 14 - line 16 -----	4-6

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/05943

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6095011	A	01-08-2000	SE 511804 C2	29-11-1999
			AU 2184997 A	01-10-1997
			CA 2248590 A1	18-09-1997
			EP 0897329 A1	24-02-1999
			JP 2000506450 T	30-05-2000
			SE 9600998 A	15-09-1997
			SE 9700091 A	15-09-1997
			WO 9733725 A1	18-09-1997
			TW 412467 B	21-11-2000
DE 19930287	A	04-01-2001	DE 19930287 A1	04-01-2001
US 4962676	A	16-10-1990	NONE	
US 5107719	A	28-04-1992	NONE	
EP 1234642	A	28-08-2002	DE 10108321 A1	29-08-2002
			EP 1234642 A1	28-08-2002
US 6301988	B1	16-10-2001	SE 508890 C2	16-11-1998
			AT 222161 T	15-08-2002
			AU 2185097 A	01-10-1997
			CA 2248627 A1	18-09-1997
			DE 69714715 D1	19-09-2002
			EP 0894038 A1	03-02-1999
			JP 2000506451 T	30-05-2000
			SE 9600999 A	15-09-1997
			SE 9700090 A	15-09-1997
			SE 9700091 A	15-09-1997
			WO 9733726 A1	18-09-1997
			TW 412467 B	21-11-2000